



FLEXIBLE TEE

- + 90° Tee Junction to existing drains
- + For horizontal and vertical installations
- + Reliable and durable solution
- + Resistant to 0.5 bar

Flexible Tee – for the connection to existing drains

The Flexible Tee connects new to existing drains and is suitable for flush-mounting and non-buried pipe connections.

The Flexible Tee is made from a durable EPDM rubber and has a noise reducing impact on downpipes.



INSTALLATION »



Cut off and remove pipe section. Loosen pipe support.




Position Flexible Tee in between plain ended pipes.



Insert plain ended pipes, tighten clamps and fix pipe support.

DESCRIPTION »

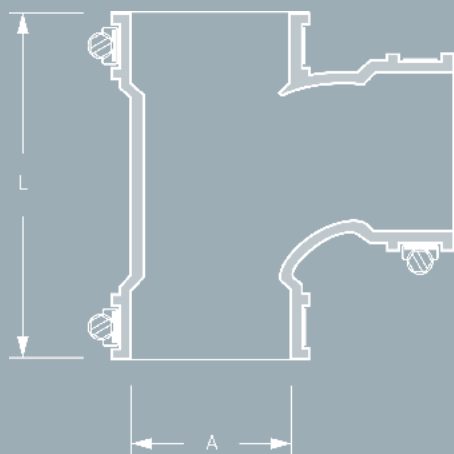

TECHNICAL SPECIFICATION »

Flexible Tee for the 90° Connection to existing drains.

Pipe 1	DN/Material	_____
Pipe 2	DN/Material	_____
Pipe 2	DN/Material	_____
Article Number		_____
Qty	Price/Unit	Total

Manufacturer:	MISSION RUBBER (UK) Ltd., Sheffield, S35 9TG, T +44 (0) 114 257 - 0040, F - 1122
Pressure Tightness:	0.6 bar water / -0.3 bar vacuum
Sealing Material:	EPDM rubber according to BS EN 681-1
Stainless Steel:	AISI 304/1.4301, alternatively AISI 316/1.4404 according to DIN EN 10088-2
Temperature Resistance:	-40°C to +120°C, temporary max. temperature +160°C
Standard/Approval:	BS EN 681-1, CE16



PRODUCT RANGE

FLEXIBLE TEE						
Article Number	Reference	A Size Range (mm)	L Length (mm)	resistant to (bar)	Nm	Weight (kg)
500074	Flexible Tee 50	40-50	125	0,6	6	0,20
500075	Flexible Tee 60	50-60	125	0,6	6	0,30
500076	Flexible Tee 90	78-90	200	0,6	6	0,60
500077	Flexible Tee 118	106-118	245	0,6	6	1,10