



Lateral Connector

M55

- + Connecting clay laterals to concrete sewers
- + Can be made to the clay size required
- + Reliable and durable solution
- + EPDM rubber profile
- + Resistant to 0.5 bar

Lateral Connector M55 – for connecting clay laterals to concrete main sewers and manholes

The Lateral Connector M55 connects plain ended clay pipes to concrete main sewers or manholes with a minimum wall thickness of 60 mm.



INSTALLATION



Drill and clean hole 90° to pipe axis.




Insert M55 into main sewer.



Apply lubricant to plain ended lateral and push lateral into M55.

DESCRIPTION

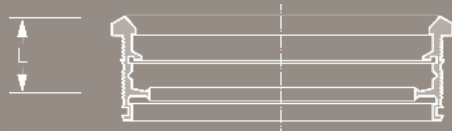

TECHNICAL SPECIFICATION



Lateral Connector M55 for connecting clay laterals to concrete main sewers with a minimum wall thickness of 60 mm.

Main Sewer
Lateral Pipe

DN/Material _____
DN/Material _____

Article Number _____

____ Qty ____ Price/Unit ____ Total

Manufacturer:
Pressure Tightness:
Jetting Resistance:
Sealing Material:
Temperature Resistance:
Standard/Approval:

MISSION RUBBER (UK) Ltd., Sheffield, S35 9TG, T +44 (0) 114 257 - 0040, F - 1122
0.5 bar water
120 bar
EPDM rubber according to BS EN 681-1
-40°C to +120°C, temporary max. temperature +160°C
BS EN 681-1, CE06, MPA Test Certificate No. 22 1743097-01

PRODUCT RANGE

LATERAL CONNECTOR M55							
Article Number	Reference	Outside Ø Lateral Pipe (mm)	Min. Wall Thickness Main Sewer (mm)	Core Drill (mm)	L Length (mm)	resistant to (bar)	Weight (kg)
32051100	M55 DN 100 Clay	131	60	146	65	0,5	0,2
32051150	M55 DN 150 Clay	186	60	200	65	0,5	0,3
32051200	M55 DN 200 N Clay	242	60	257	65	0,5	0,4
32051250	M55 DN 250 N Clay	299	60	315	65	0,5	0,5

